




2354LF / 2354SF -11W1

PHILIPS LEDISK x 1 , 80 CRI
11W / 230V / 800 lumen Tc 70°C

- View angle - 85 deg.
- Alum. black heat-sink
- Tempered frosted glass
- Alum. die-cast body
- Non-dimmable driver integrated



2354LF



2354SF



DB



SL



DG

6603-3W1

- CREE LED x 1, 80 CRI
- 3W / 700mA / 148 lumen Tj 25°C
- 132 lumen Tj 85°C
- Polycarbonate reflector 40 deg.
- Driver integrated
- Tempered step glass
- Alum. die-cast body / trim


6603-7

- 1 x MLF 7W / 9W
- 230V, GX53

6603-10

- 1 x HI-SPOT 50W
- 230V, GU10

- Tempered step glass
- Alum. die-cast body / trim




- Reflector 15 deg. + Clear PC cover



- Reflector 28 deg. + Clear PC cover



- Reflector 40deg. + Clear PC cover





6616



6617



6618

6616-3W1

CREE LED x 1, 80 CRI
3W / 700mA / 148 lumen Tj 25°C
132 lumen Tj 85°C

6617 / 6618-3W2

CREE LED x 2, 80 CRI
3W x 2 / 700mA / 148 x 2 lumen Tj 25°C
132 x 2 lumen Tj 85°C

- Polycarbonate reflector 40 deg.
- Driver integrated
- Tempered step glass
- Alum. die-cast body / trim
- Outside aluminum body cover

6616-7

1 x MLF 7W / 9W
230V, GX53

6617 / 6618 -7

2 x MLF 7W / 9W
230V, GX53

6616-10

1 x HI-SPOT 50W
230V, GU10

6617 / 6618 -10

2 x HI-SPOT 50W
230V, GU10

- Tempered step glass
- Alum. die-cast body / trim
- Outside aluminum body cover





- Reflector 15 deg. +
Clear PC cover




- Reflector 28 deg. +
Clear PC cover




- Reflector 40deg. +
Clear PC cover




6616



6617



6618

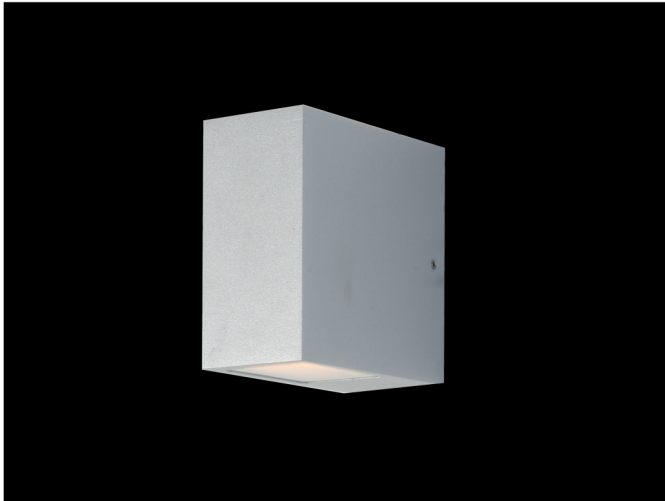

6629-3W1

CREE LED x 1 , 80 CRI
3W / 700mA / 148 lumen Tj 25°C
132 lumen Tj 85°C

- Driver integrated
- Tempered frosted glass
- Aluminum extrusion body

6629-3W2



CREE LED x 2 , 80 CRI
3W x 2 / 700mA / 148 x 2 lumen Tj 25°C
132 x 2 lumen Tj 85°C

- Driver integrated
- Tempered frosted glass
- Aluminum extrusion body



6629-9

1 x HALOPIN 25W / 230~240V, G9
- Tempered frosted glass
- Aluminum extrusion body



6629


Wall lamp



9600-3W1

CREE LED x 1, 80 CRI
3W / 700mA / 148 lumen Tj 25°C
132 lumen Tj 85°C



- Driver integrated
- Tempered glass
- PC recessed box
- Alum. die-cast body




6100-5W1

LUSTEOUS LED x 1, 80 CRI
5W / 700mA / 180 lumen

- Driver integrated
- Tempered glass
- PC installation box
- Alum. die-cast body



9600



6100




6302-9

2 x  HALOPIN MAX 25W
230V, G9




6319-11

1 x  QR-CBC35 35W
12V, GU4



- Electronic transformer integrated




9612-3W2 

3W x  2 LED, 500mA
- Driver integrated
- Lens 38 deg.
- Warm White : 3150K
- Cool White : 5300K






9611-5W1 

5W x  1 LED, 700mA
- Driver integrated
- Lens 38 deg.
- Warm White : 3150K
- Cool White : 5300K




Recessed wall lamp - Aluminium IP65

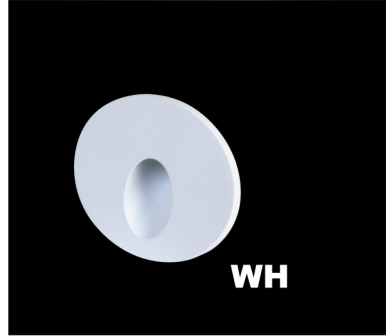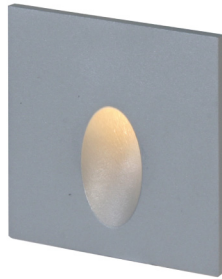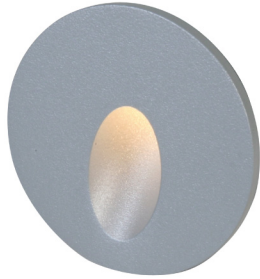



9618 / 9619 -3W1

CREE LED x 1, 80 CRI
 3W / 700mA / 148 lumen Tj 25°C
 132 lumen Tj 85°C

- Driver integrated
- Tempered clear glass
- Alum. installation box
- Alum. body / trim



9618



9619

